

SOPHSTONE

Luxurious Architectural Bathware

SOPHSTONE Installation Guide


Acknowledgments

Thank you for choosing SOPHSTONE for your unique application. By attentively following the instructions provided herein, you can ensure that your product will operate as intended and yield many years of reliable function.


Please note that your specific application or installation may necessitate certain expertise or have unique installation requirements beyond the scope of this installation guide. Please review all available resources when preparing to install your product.

If at any time you have questions or concerns while installing your product, you may contact a SOPHSTONE representative by phone at 1-844-539-1801 or by email at Info@SOPHSTONE.com and we will assist you in any way possible.

This Installation Guide Applies to the Following Products...

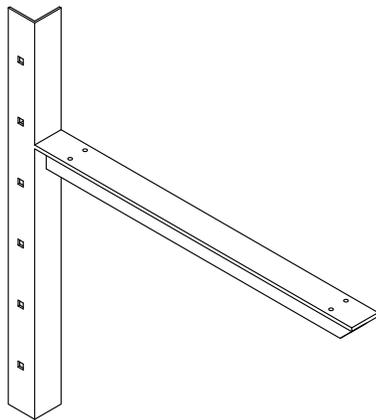

ECB24, ECB18, ECB12

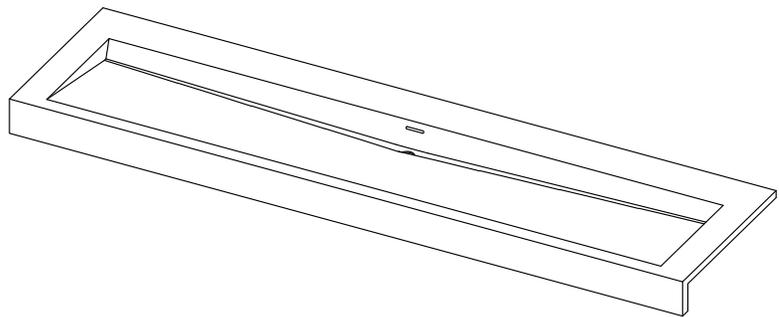


SOPHSTONE COMMERCIAL SINKS

Sink Preparation:

FAUCET HOLES


- If your sink does not include pre-drilled faucet holes, determine if holes need to be drilled.
- If faucet holes need to be drilled, review your faucet specification sheets and determine location requirements.
- Lay masking tape over the sink (to protect the surface) and mark locations for faucet holes on the tape. Drill a small pilot hole at each location.
- Using a diamond tipped core bit, carefully drill through the pilot holes.

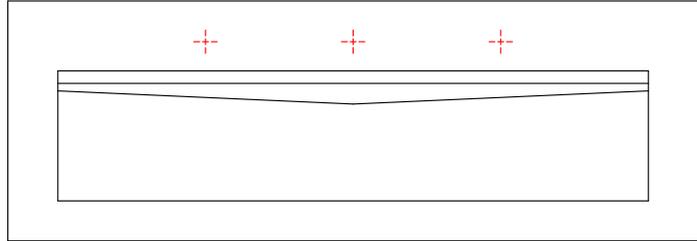

For Trim-Ready Sinks ONLY:


CUT TO SIZE

- Sinks designed with additional included counter space can be trimmed to size.
- Do not trim material if your sink was not designed to be trimmed.
- Determine the final sink length. Lay masking tape over the sink and mark on the tape where material must be trimmed.
- Cut the sink to size using a diamond tipped blade; Diamond blades designed to cut natural stone smoothly and with minimal chipping will work similiarly well when cutting SOPHSTONE products.

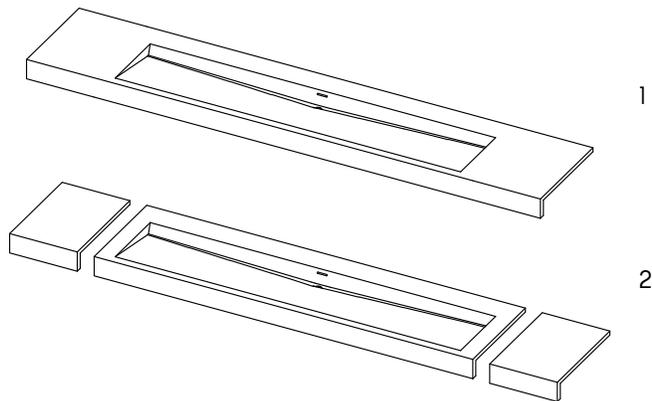

FINISHING


- Remove all masking tape and use acetone to remove any residue left by the masking tape.
- Edges that have been created from drilling or trimming may have sharp burs, use caution when handling the sink.
- Remove any burs or imperfections while being careful not to scratch or damage the sink in the process.



Installation Instructions:


STUDS & SUPPORT

- Locate studs or similarly strong members to mount your brackets onto.
- These members must be strong enough to support the entire weight of your fixture; refer to available materials to determine the weight of your fixture.

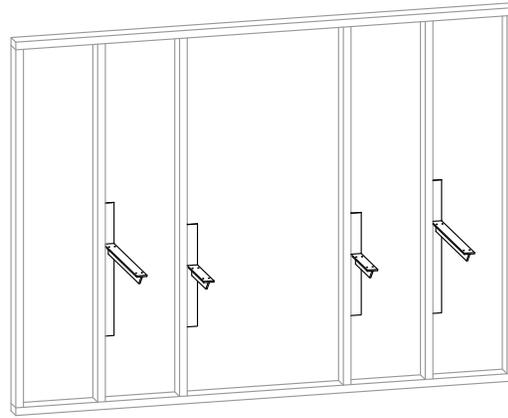


BRACKET PLACEMENT

- Mount primary and secondary brackets using the provided hardware.
- The primary brackets should be mounted 1" to 1-1/4" lower than the intended finish height. Mount secondary brackets 1/4" lower than needed. The sink will be shimmed to finish height further in the installation.
- Brackets should be placed every 30" - 36" linearly along the sink; additional studs or members may be needed to meet this requirement.

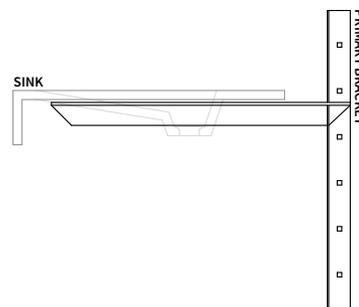


EXAMPLE PRIMARY BRACKET

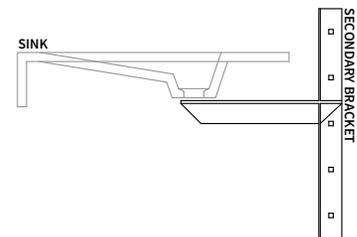

EXAMPLE SECONDARY BRACKET

SINK MOUNTING

- Mount your sink onto your installed brackets similar to the shown diagram.
- Shim sink to final install height.
- Once the sink has been shimmed to the final install height, use construction adhesive to fasten the sink in place.

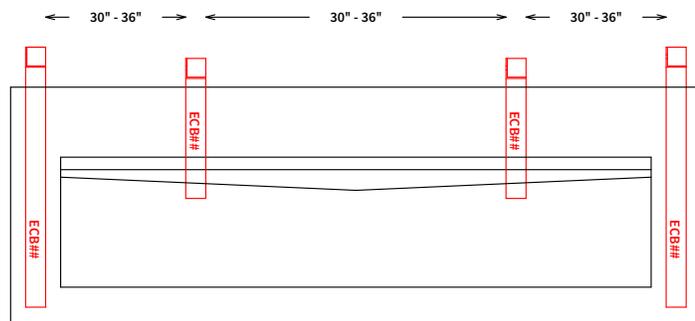

EXAMPLE DIAGRAM